





R.P.M. 2850

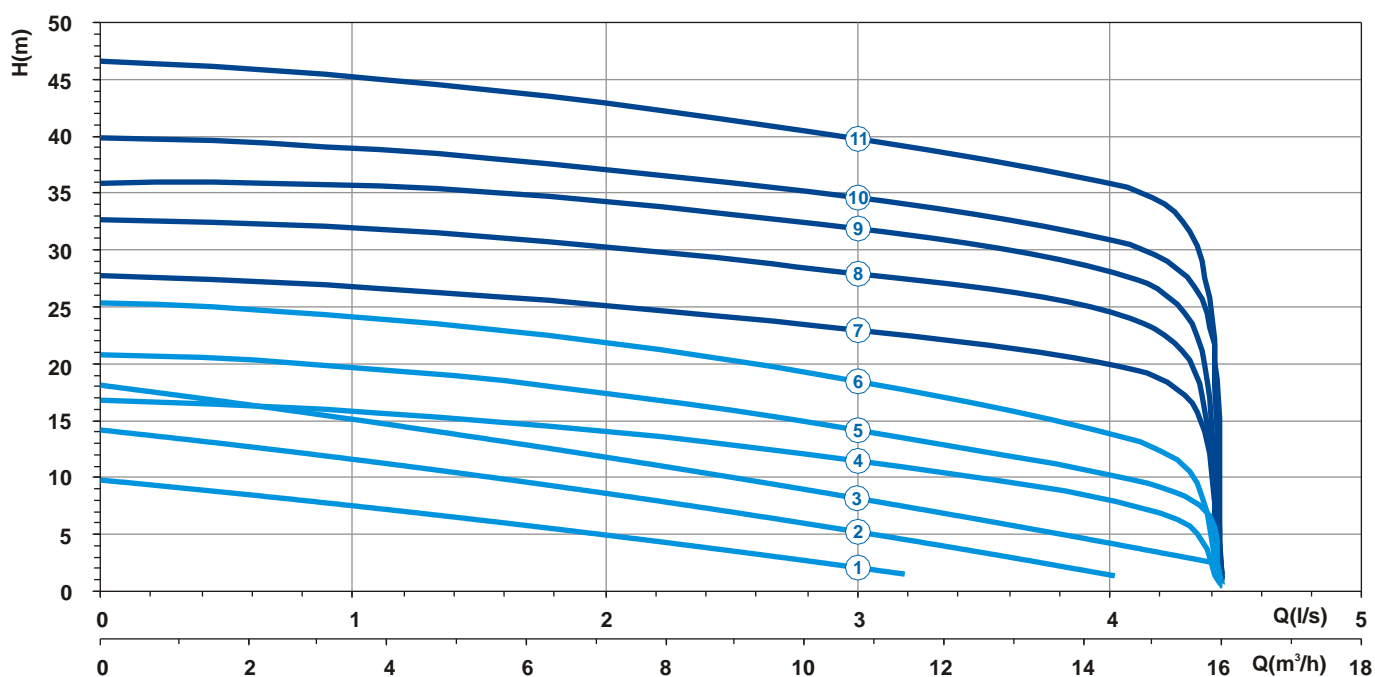

Curve N°	Code	Type	Input P P1 kW	Hydr. P P2 kW	Max. I A	Power Supply	DN mm	Free Pass. mm	Weight Kg	Code 
1	7005500	G271M3T3-J6AD1	0,9	0,6	7,6	1ph 230V- 50 Hz	40	6	40	-
	7005472	G271T3T3-J6AA0	0,9	0,7	5	3ph 400V- 50 Hz	40	6	40	7005633
2	7005499	G271M3T2-J6AD1	1,2	0,8	7,6	1ph 230V- 50 Hz	40	6	40	-
	7005471	G271T3T2-J6AA0	1,2	0,9	5	3ph 400V- 50 Hz	40	6	40	7005877
3	7005475	G271M3T1-J6AD1	1,4	0,9	7,6	1ph 230V- 50 Hz	40	6	40	-
	7005030	G271T3T1-J6AA0	1,4	1,1	5	3ph 400V- 50 Hz	40	6	40	7005971
4	7003031	G271M6T3-J6AD1	1,4	0,9	7,6	1ph 230V- 50 Hz	40	6	40	-
	7002052	G271T6T3-J6AA0	1,4	1,1	5	3ph 400V- 50 Hz	40	6	40	7002789
5	7003028	G271M6T2-J6AD1	1,5	1,1	7,6	1ph 230V- 50 Hz	40	6	40	-
	7002051	G271T6T2-J6AA0	1,5	1,2	5	3ph 400V- 50 Hz	40	6	40	7002701
6	7003026	G271M6T1-J6AD1	2,0	1,4	13,4	1ph 230V- 50 Hz	40	6	40	-
	7002050	G271T6T1-J6AA0	2,0	1,6	5	3ph 400V- 50 Hz	40	6	40	7002788
7	7001041	G209T6T2-J7AA0	2,5	2,2	6,2	3ph 400V- 50 Hz	40	7	45	7002808
8	7001042	G209T6T1-J7AA0	3,2	2,7	6,2	3ph 400V- 50 Hz	40	7	45	7009498
9	7001924	G210R6T3-J7AA2	3,8	3,2	13	3ph 400/690V- 50 Hz	40	7	60	7002803
10	7001923	G210R6T2-J7AA2	4,2	3,5	13	3ph 400/690V- 50 Hz	40	7	60	7002802
11	7001600	G210R6T1-J7AA2	4,9	4,1	13	3ph 400/690V- 50 Hz	40	7	60	7002801