





R.P.M. 2850

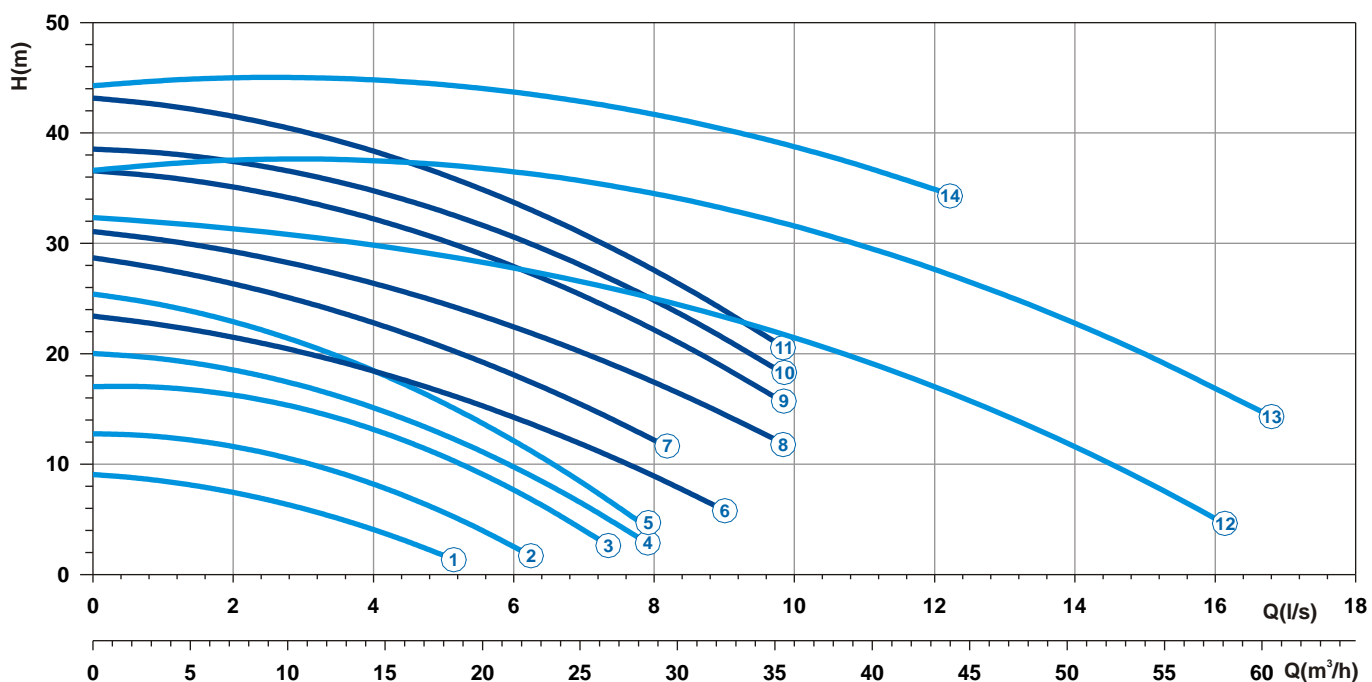

Curve N°	Code	Type	Input P P1 kW	Hydr. P P2 kW	Max. I A	Power Supply	DN mm	Free Pass. mm	Weight Kg	Code 
1	7003651	X271M6D5-J6LA4	0,9	0,6	13,4	1ph 230V- 50 Hz	40	6	37	7003697
	7003652	X271T6D5-J6LA4	0,8	0,6	3,2	3ph 400V- 50 Hz	40	6	37	7003681
2	7003649	X271M6D4-J6LA4	1,1	0,8	13,4	1ph 230V- 50 Hz	40	6	37	7003696
	7003650	X271T6D4-J6LA4	1,0	0,7	3,2	3ph 400V- 50 Hz	40	6	37	7003680
3	7003647	X271M6D3-J6LA4	1,4	1,0	13,4	1ph 230V- 50 Hz	40	6	37	7003695
	7003648	X271T6D3-J6LA4	1,4	1,1	5	3ph 400V- 50 Hz	40	6	37	7003678
4	7003645	X271M6D2-J6LA4	1,7	1,2	13,4	1ph 230V- 50 Hz	40	6	37	7003694
	7003646	X271T6D2-J6LA4	1,7	1,3	5	3ph 400V- 50 Hz	40	6	37	7003677
5	7003643	X271M6D1-J6LA4	2,2	1,6	13,4	1ph 230V- 50 Hz	40	6	37	7003693
	7003644	X271T6D1-J6LA4	2,2	1,7	5	3ph 400V- 50 Hz	40	6	37	7003676
6	7003642	X209T6D2-J7LA4	2,7	2,2	6,2	3ph 400V- 50 Hz	40	7	49	7003674
7	7003641	X209T6D1-J7LA4	3,5	2,9	6,2	3ph 400V- 50 Hz	40	7	49	7003673
8	7003640	X210R6D4-J7LA5	3,8	3,2	13	3ph 400/690V- 50 Hz	40	7	67	7003672
9	7003639	X210R6D3-J7LA5	4,8	4,0	13	3ph 400/690V- 50 Hz	40	7	67	7003671
10	7003638	X210R6D2-J7LA5	5,3	4,4	13	3ph 400/690V- 50 Hz	40	7	67	7003670
11	7003637	X210R6D1-J7LA5	6,3	5,3	13	3ph 400/690V- 50 Hz	40	7	67	7003669
12	7000761	X211R7D3-G8LA5	6	5,1	14,1	3ph 400/690V- 50 Hz	2"	8	92	-
13	7000599	X211R7D2-G8LA5	7,9	6,7	14,1	3ph 400/690V- 50 Hz	2"	8	92	-
14	7000262	X211R7D1-G8LA5	9	7,7	14,1	3ph 400/690V- 50 Hz	2"	8	92	-