

ECOCLEAN[®]

Compressed air filter

VF 25, FF5, MFO , SMA , CA




Advantages of ECOCLEAN[®] compressed air filter



Differential pressure gauge

A differential pressure indicator, which indicates the economically optimal time to you, in order to change the Filterelement, is contained in the scope of supply.

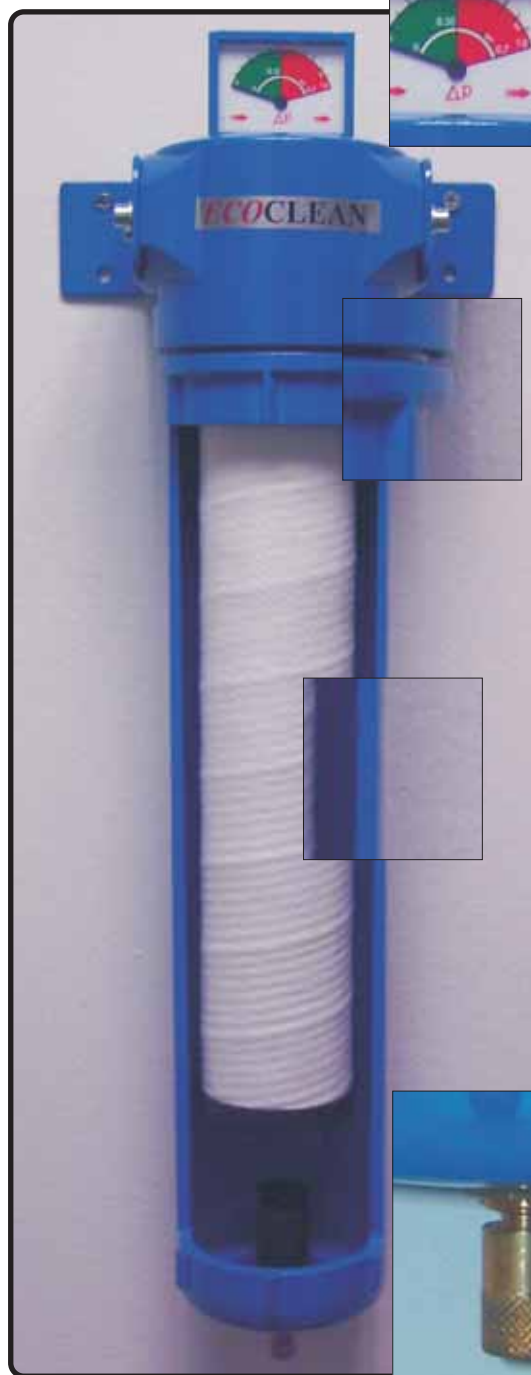

Housing

The compressed air filter ECOCLEAN[®] is made as aluminium pressure casting. The maximum working pressure is 16 bar.

Coat

The filter housings are coated with a special coating at the inside against corrosion and bacterial attack. At the outside the housing is powder coated.



Drain

In the scope of supply of the standard filter an automatic drain of the type D120 is included. This is made of nickel-plated brass, with manually adjusting half mechanism. The drain works already for years as absolutely reliable and insensitive..